safe and reliable

NEW IN OUR FAMILY

Type PKIII/C and PKIII/CD

Butterfly Flap Valve for Gaseous Media Electro-Pneumatic Operated

Edition: 05.18
Subject to change without notice

APPLICATION AREA

- Automatic shut-off valves for gaseous media, designed as Butterfly flap valve in single or double seat design with EC-type-Examination (Module B) in acc. with PED (up to DN 1600)
- Main shut-off for gas systems
- Pipe systems for gaseous media and fuels in all industrial sectors

ADVANTAGE
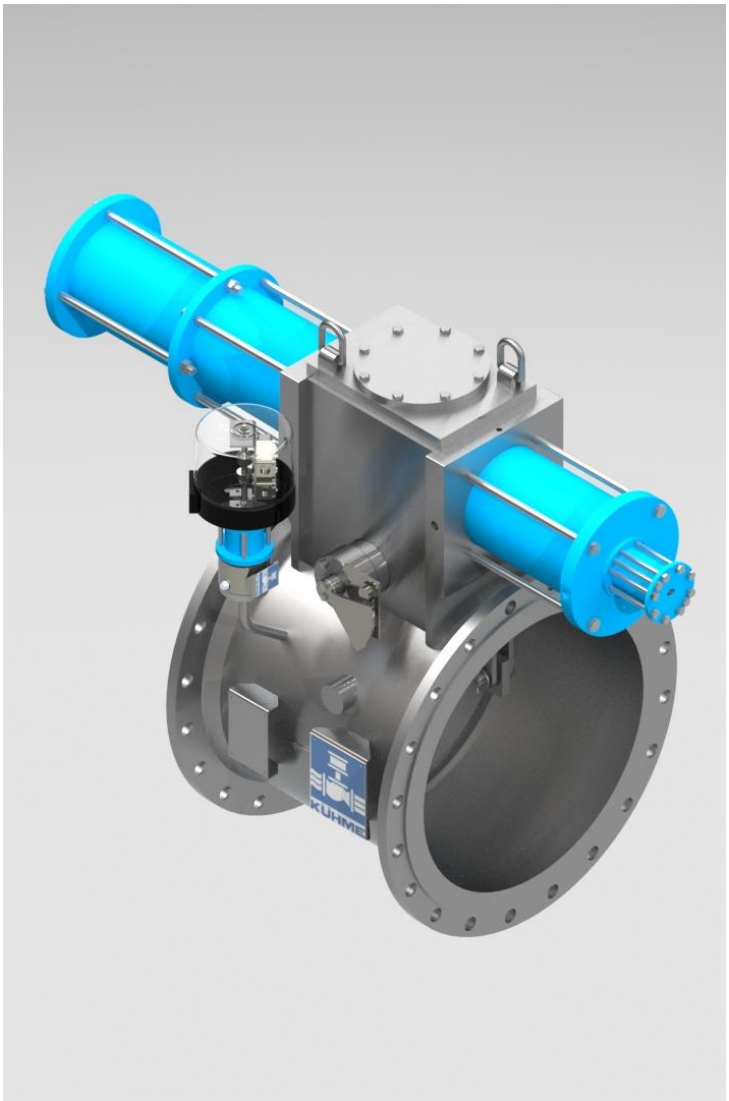
- Closing time < 3 seconds
- Highest Tightness Class (leakage rate A in acc. with EN 12266-1)
- Closing of the valve is dampened to reduce pressure surges in the pipeline
- Heavy duty design for high amount of operating cycles
- High-performance valve with long service life
- Double seat - one valve instead of two separate valves - compact and cost-efficient solution
- Convenient automatic testing of the sealing system during plant operation - without having to dismantle the valve